


The HF Series is designed to withstand heavy production schedules. This high intensity work light is available in 3 different configurations including a flexible gooseneck, long-reach heavy duty articulating arm and spot light. The HF series is offered with either an integrated transformer for 120V/230V or in a low-voltage version for direct connection to machinery. A spot reflector and clear lens are standard. A 12V/50W long-life halogen light bulb is included.

Features include:

- Moisture-resistant design for harsh environments
- Flexible gooseneck or heavy-duty articulating arm resists heavy vibration
- Powerful 50W halogen bulb provides bright, white light (75W bulb optional)
- Swivel joint allows for easy light positioning
- Designed with high impact polyamide plastic which stays virtually scratch-free

*IP65 version available on low voltage models

Model HF2000-20

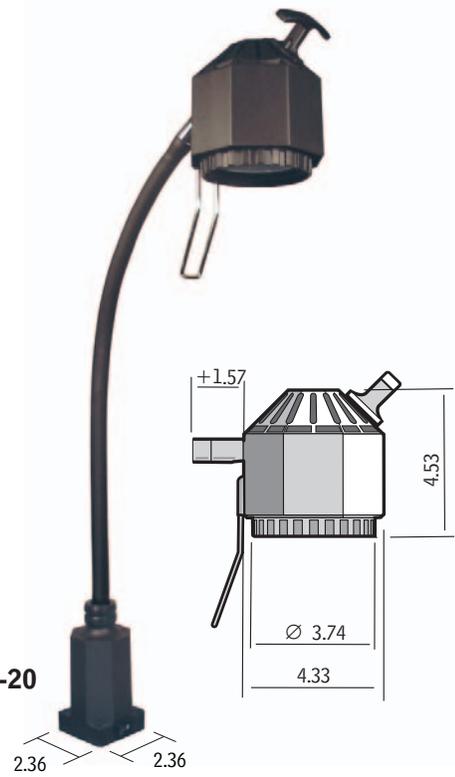

HF2000 - Flexible Gooseneck Light

	Standard	Optional
Power Supply	120V	230V (Euro plug)
Arm Length	20"	12", 27"
Lamp Head	Swivel joint	Straight neck
Lens/Filter	Clear	Frosted
Base	Direct	Magnetic, C-Clamp, Table, L-bracket
Switch	Rocker switch on base	Toggle switch on head
Dimmer	No	No
Cord	7' SJT	-
Safety Class (Int'l)	IP20	-
Color	Matte black	Off-white



*IP65 is an industry standard implying resistance to dust and water.

Model HF2000-27W



Switch on Head (-HS)
For convenient on/off control, a switch is mounted on the back of the lamphead.




HF2010 AAS Heavy Duty (HD) Light

	Standard	Optional
Power supply	120V (plug in transformer)	230V (plug in transformer Euro)
Arm Length	39" two-section	49" three-section
Lamp Head	Swivel joint	-
Lens/Filter	Clear	Frosted
Base	Universal mount	C-Clamp
Switch	Toggle switch on head	-
Dimmer	No	No
Cord	7' cord - plug in transformer	-
Safety Class (Int'l)	IP20	-
Color	Nickel plated steel black joints	-

The HF2010 AAS model comes standard with a heavy duty articulating arm that offers extensive reach. This unique arm system keeps the lamp in position - even in the harshest environments.

Features include:

- Rugged 39" (1000mm) or 49" (1250mm) steel articulating arm for extensive reach
- Adjustable joints for easy positioning
- Heavy-duty, vibration resistant arm ideal for the most demanding environments
- Designed with high impact polyamide plastic which stays virtually scratch-free

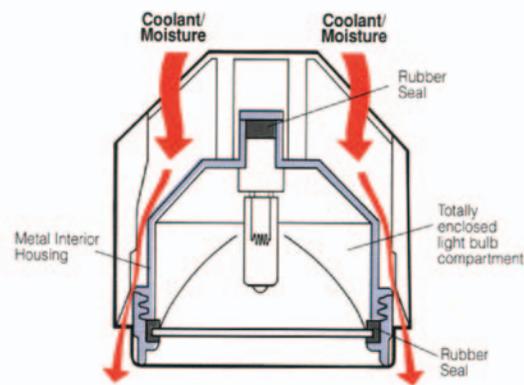

Moisture-proof lens/reflector/lamp compartment is totally enclosed by a metal interior housing and rubber seals making the lamps ideal for even the harshest applications.

HF Series Accessories



Lenses/Filters include clear or frosted lenses.



Bulbs supplied are 12V/50W/75W halogen. Optional 12V/50W/75W Dichroic Lamps dissipate 60% of heat through back of lamp thus reducing the amount of heat projected forward.



**Model
HF2100-20**

HF2100 Low Voltage Flexible Gooseneck Light

	Standard	Optional
Power supply	12V	24V
Arm Length	20"	12", 27"
Lamp Head	Swivel joint	-
Lens/Filter	Clear	Frosted
Base	Square	Rectangular, Panel
Switch	Rocker switch on base	Toggle switch on head
Dimmer	No	No
Cord	7' SVT P302 plug	6" lead wires
Safety Class (Int'l)	IP20	IP65
Color	Matte Black	Off-white

Features include:

- Powerful 50W halogen bulb provides bright, white light (75W bulb optional)
- Moisture-resistant design for harsh environments
- Rugged PUR-sleeved gooseneck
- Remote transformer option available
- IP65 version available



Transformers Model 610

120V/12V, 75VA, all steel design, zinc plated enclosure, circuit breaker protection, S302 Cinch-Jones socket for P302 lamp cord plug. 7' SJT cord with grounded plug. For use with low voltage lamps.

Model 610-05B

Transformer core/coil 120V/12V, 75VA with mounting brackets. For installation in an enclosure.

HF 2100 Base Configurations



Square




Rectangular



Panel



HF Series Lux Table 50W

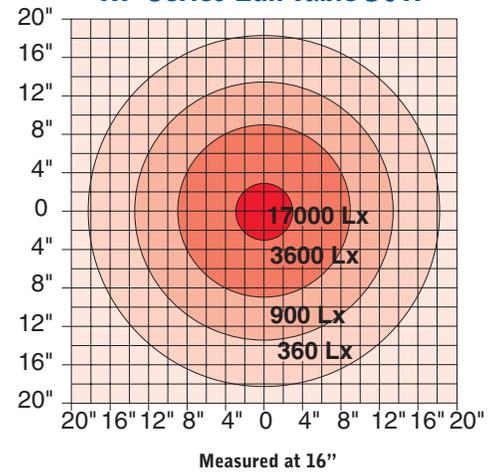


Ideal for applications including:

- Industrial Machinery
- Assembly and Inspection Areas
- Machine Tools



HF Series Lux Table 75W

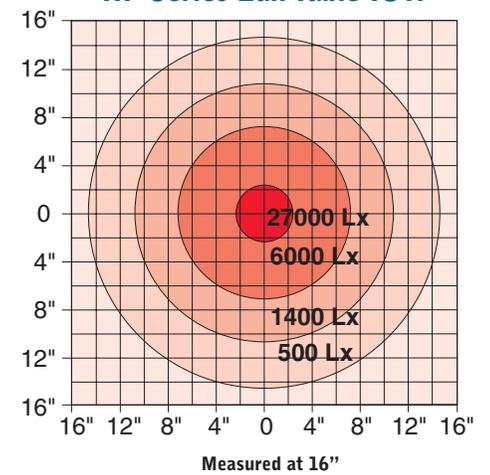

HF Series Mounting Options

