

## HS Series Lights – 220V

### **IMPORTANT SAFETY INSTRUCTIONS** **This portable luminaire uses 12V/20W bulb**

This portable luminaire has a 2 prong plug EU plug. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.

### **IMPORTANT SAFETY INSTRUCTIONS** **Lighted lamp is HOT!**


\* **Combustibles - WARNING RISK OF FIRE/INJURY TO PERSONS.** Keep away from combustibles. Unplug to change the bulb. Do not touch bulb.

\* **UV filter - Do not operate without complete bulb enclosure in place or if the lens is damaged.**

\* **Warning - To reduce the risk of FIRE, ELECTRIC SHOCK, EXPOSURE TO EXCESSIVE UV RADIATION, OR INJURY TO PERSONS:**

1. Turn off/unplug and allow to cool before replacing bulb.
2. Bulb gets HOT quickly! Only contact switch/plug when turning on.
3. Do not touch hot lens, guard, or enclosure.
4. Do not remain in light if skin feels warm
5. Do not look directly at lighted lamp
6. Keep lamp away from materials that may burn
7. Use only with a 20 watt or smaller bulb
8. Do not touch bulb at any time. Use a soft cloth. Oil from skin may damage bulb.
9. Do not operate portable lamp with a missing or damaged guard, lamp containment barrier, or UV filter.

### **SAVE THESE INSTRUCTIONS**

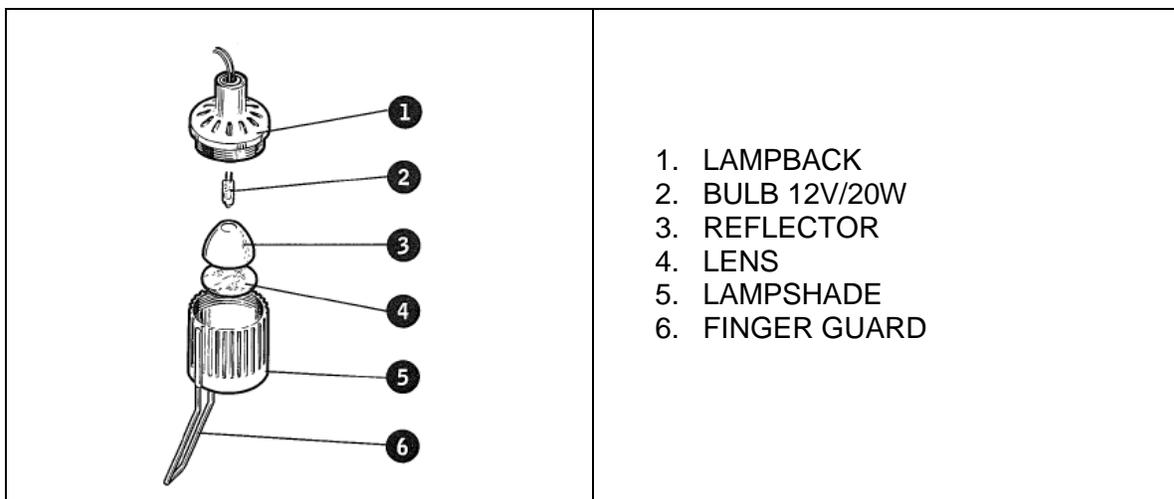


## HS Series Lights – 220V

### SHADE REMOVAL FOR HS SERIES BULB REPLACEMENT

**\*\*BE SURE THAT LAMP HAS COOLED SUFFICIENTLY PRIOR TO PERFORMING BULB REPLACEMENT\*\***

- 1) Before changing light bulb, set switch to off position and unplug lamp cord from wall socket. Let lamp cool off before starting.
- 2) Locate the set screw, that secures the lamp shade to the lamp housing (it is a small flat slotted screw found at the top edge of the shade between the ribs holding the arc / finger guard)
- 3) Unscrew the set screw (counter clockwise) using a small slotted screwdriver.
- 4) Gently grasp the bottom portion of the shade, and rotate counter clockwise to unscrew the lamp shade from the lamp housing. This will expose the bulb.
- 5) Gently pull the bulb forward releasing it from the socket.
- 6) Use plastic wrapper or tissue paper as protection for the new bulb when replacing. (Oils or impurities from fingers can adversely affect the life of Quartz halogen bulbs) The lamp is furnished with a 12 Volt-20 Watt Halogen bulb G4 Pin Base.
- 7) Insert the pins of the new bulb into the corresponding holes of the socket, and push firmly to seat the replacement bulb.
- 8) Replace the lamp shade, by assuring the bulb is inserted into the hole of the bulb reflector and screwing the shade clockwise until it stops. *\*DO NOT OVER TIGHTEN- as this may cause damage to the threads of the lamp housing\**
- 9) Replace the set screw, by re-inserting it into the corresponding hole, and securing it (clockwise) with a small slotted screwdriver.

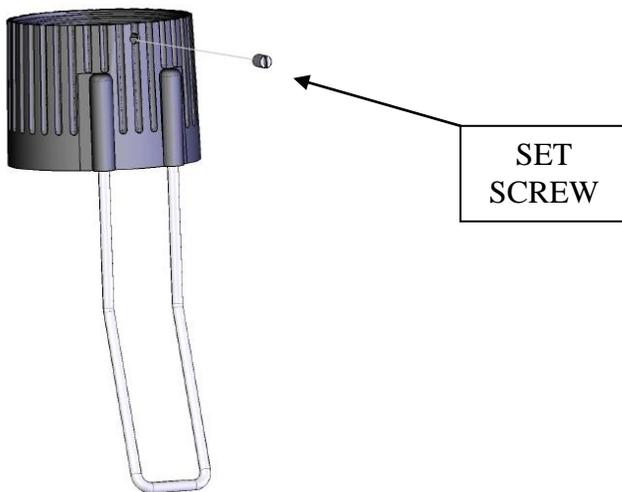

- 10) Your lamp is now operational.