



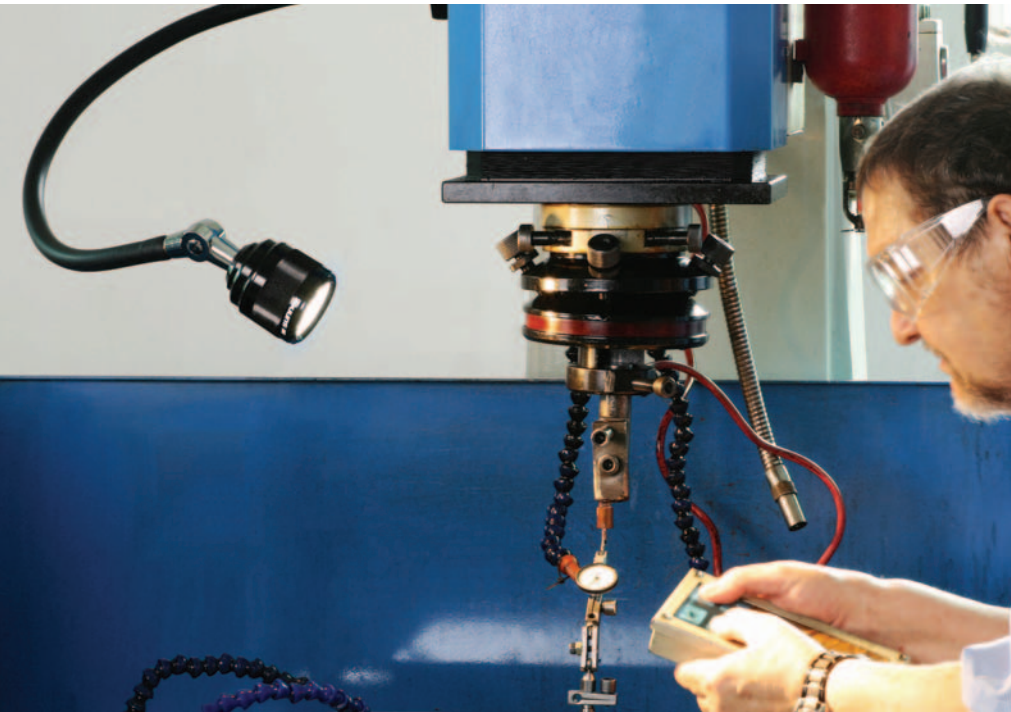

## HIGH OUTPUT LED TASK LIGHT

SL9 Series LED Task Light comes standard with dimmer and moisture-resistant lamphead

- High Light Output, up to 36000 Lux at 20 inches (50 cm)
- High Energy Efficiency, 6W
- High CRI of 85, suitable for applications requiring good color rendering
- Moisture resistant, the IP65 rating make SL9 ideal for harsh and moist job environments
- Dimmer function comes as standard

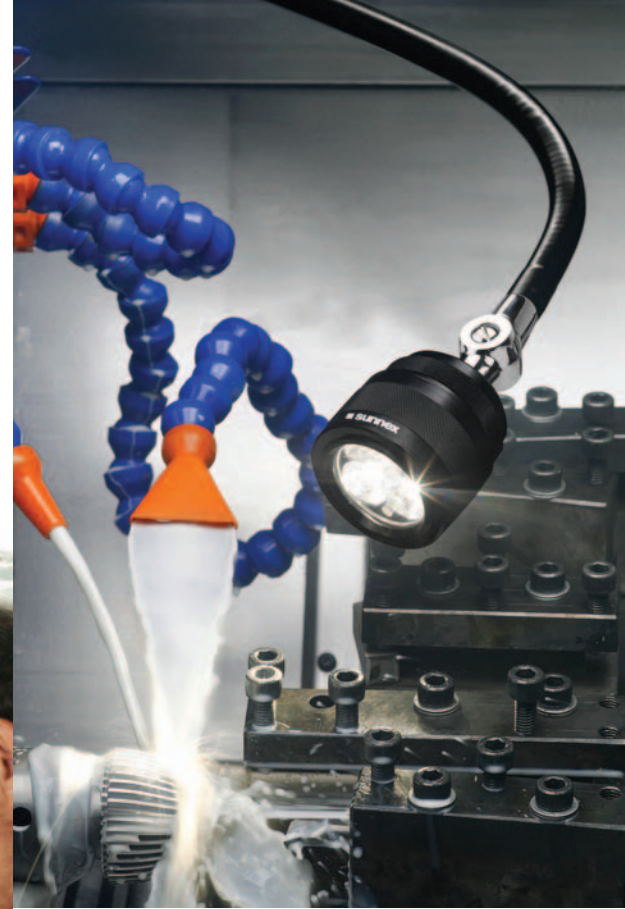

#### Applications:

- Water-Sprayed Workshop
- Industrial Light
- Medical Equipment Illumination



## 6W Power LED Light

Introducing Sunnex new SL9 Power LED Task Light series:

- Light output equal to 50W halogen bulb
- Saves approximately 80% energy compared to halogen bulb
- Dimmable lighting on/off switch function
- Available in selectable options of beam angles at 10° or 25°
- IP65 water-resistant head offers complete protection in moist work environments
- Excellent for both industrial and medical equipment applications

SPECIFICATIONS	
LED	3 x Hi Power-LED
connected load	12-24V; AC/DC 50/60Hz
work equipment	electronic plug-in transformer for 100-240V AC input European/American plug (N1-15P)
mains lead	10 ft.
<b>Luminaire body</b>	
material	aluminum #6063
surface	anodized black / painted white
fastening	panel mount / sub-base
arm length	50/70cm G-neck with sleeving
power consumption	6W 12VAC
technology	dimmable with on/off
glass filter	transparent standard
ingress protection	IP65
class of protection	class III for 12-24V only class II for 100-240V
color temperature	4200K
beam angle	10° standard, 25° optional
<b>Luminous efficacy</b>	
lux under 50cm	36000 Lux (10°) 6400 Lux (25°)
CRI	approx. 85

## High Output LED Task Light

Standard configurations of the SL9 series with the swivel joint and gooseneck for mobility and ease of reach.



### Sunnex SL9 - Gooseneck Arm

with square mounting base, 6W LED bulb and a 20" or 27" gooseneck.

### Sunnex SL9 - Spot Arm

Swivel joint lamp head is available to be mounted on wall bracket or desktop base. On/off function is handled with switch in lamp base or dimmer head.




### Dimmer


The IP65 housing with dimmable LED technology and modern design. It's a perfect fit for different kinds of working environments.



Industrial LED Light, 12VAC/6W, 10°

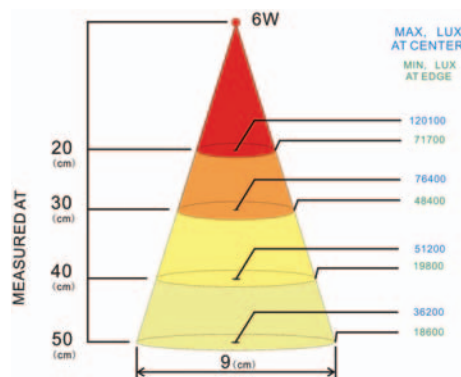

Industrial LED Light, 12VAC/6W, 25°

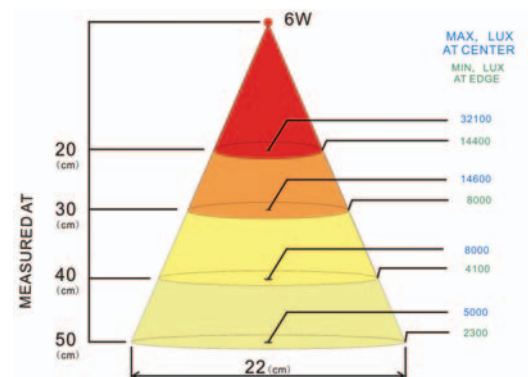

# Standard Features for Industrial LED Task Light SL9 Series:

- IP65 panel-mount, low voltage 20" or 27" gooseneck
- IP65 square base, low voltage works perfect as desk light, with 20" or 27" gooseneck
- Plug-in, square base, low voltage, selected gooseneck length
- All SL9 series come with dimmable function, black or off-white
- Optional plug-in transformers 100-240V~ 50/60Hz for low base version
- Beam angle in 10° optics (25° optics on request)



### Explanation to SL9 Series e.g. SL-120B10L-302

Series	Mounting	Gooseneck Length	Color	Beam Angle	Input Voltage	Plug-In
SL9-	<b>1</b> = Panel	<b>00</b> = Spot)	<b>B</b> = Black	<b>10</b> = 10°	<b>L</b> = 12-24V AC/DC	<b>302</b> = Cinch Plug
	<b>2</b> = Low Sq. Base	<b>20</b> = 20 inch	<b>W</b> = White	<b>25</b> = 25°	<b>H</b> = 100-210V AC	
		<b>27</b> = 27 inch				

Series	Sunnex No.	Mounting	Arm Length	Voltage	Color	Optics	IP Rating	Product Photo
SL9-120	SL9-120B10L	Panel	20-inch panel	12-24V AC/DC	Black	10°	IP65	
	SL9-120B25L	Panel	20-inch panel	12-24V AC/DC	Black	25°	IP65	
	SL9-120W10L	Panel	20-inch panel	12-24V AC/DC	White	10°	IP65	
	SL9-120W25L	Panel	20-inch panel	12-24V AC/DC	White	25°	IP65	
SL9-127	SL9-127B10L	Panel	27-inch panel	12-24V AC/DC	Black	10°	IP65	
	SL9-127B25L	Panel	27-inch panel	12-24V AC/DC	Black	25°	IP65	
	SL9-127W10L	Panel	27-inch panel	12-24V AC/DC	White	10°	IP65	
	SL9-127W25L	Panel	27-inch panel	12-24V AC/DC	White	25°	IP65	
SL9-200	SL9-200B10L	Low Square Base	No-arm spot	12-24V AC/DC	Black	10°	IP65	
	SL9-200B25L	Low Square Base	No-arm spot	12-24V AC/DC	Black	25°	IP65	
	SL9-200W10L	Low Square Base	No-arm spot	12-24V AC/DC	White	10°	IP65	
	SL9-200W25L	Low Square Base	No-arm spot	12-24V AC/DC	White	25°	IP65	
	SL9-200B10H	Low Square Base	No-arm spot	100-240 AC	Black	10°	IP65	
	SL9-200B25H	Low Square Base	No-arm spot	100-240 AC	Black	25°	IP65	
	SL9-200W10H	Low Square Base	No-arm spot	100-240 AC	White	10°	IP65	
	SL9-200W25H	Low Square Base	No-arm spot	100-240 AC	White	25°	IP65	
SL9-220	SL9-220B10L	Low Square Base	20 inch	12-24V AC/DC	Black	10°	IP20	
	SL9-220B25L	Low Square Base	20 inch	12-24V AC/DC	Black	25°	IP20	
	SL9-220W10L	Low Square Base	20 inch	12-24V AC/DC	White	10°	IP20	
	SL9-220W25L	Low Square Base	20 inch	12-24V AC/DC	White	25°	IP20	
	SL9-220B10H	Low Square Base	20 inch	100-240 AC	Black	10°	IP20	
	SL9-220B25H	Low Square Base	20 inch	100-240 AC	Black	25°	IP20	
	SL9-220W10H	Low Square Base	20 inch	100-240 AC	White	10°	IP20	
	SL9-220W25H	Low Square Base	20 inch	100-240 AC	White	25°	IP20	
SL9-227	SL9-227B10L	Low Square Base	27 inch	12-24V AC/DC	Black	10°	IP65	
	SL9-227B25L	Low Square Base	27 inch	12-24V AC/DC	Black	25°	IP65	
	SL9-227W10L	Low Square Base	27 inch	12-24V AC/DC	White	10°	IP65	
	SL9-227W25L	Low Square Base	27 inch	12-24V AC/DC	White	25°	IP65	
	SL9-227B10H	Low Square Base	27 inch	100-240 AC	Black	10°	IP65	
	SL9-227B25H	Low Square Base	27 inch	100-240 AC	Black	25°	IP65	
	SL9-227W10H	Low Square Base	27 inch	100-240 AC	White	10°	IP65	
	SL9-227W25H	Low Square Base	27 inch	100-240 AC	White	25°	IP65	
SL9-Plug-In	SL9-120B10L-302	Cinch Plug	20-inch plug-in	12-24V AC/DC	Black	10°	-	
	SL9-120B25L-302	Cinch Plug	20-inch plug-in	12-24V AC/DC	Black	25°	-	
	SL9-120W10L-302	Cinch Plug	20-inch plug-in	12-24V AC/DC	White	10°	-	
	SL9-120W25L-302	Cinch Plug	20-inch plug-in	12-24V AC/DC	White	25°	-	
	SL9-127B10L-302	Cinch Plug	27-inch plug-in	12-24V AC/DC	Black	10°	-	
	SL9-120B25L-302	Cinch Plug	27-inch plug-in	12-24V AC/DC	Black	25°	-	
	SL9-120W10L-302	Cinch Plug	27-inch plug-in	12-24V AC/DC	White	10°	-	
	SL9-120W25L-302	Cinch Plug	27-inch plug-in	12-24V AC/DC	White	25°	-	